

## Auto-Max® II

Auto-Max II® is a fully integrated, two-unit railcar design with unmatched security. Tight-sealing composite doors have lockable bars and deck access ladders are hidden inside the doors to prevent roof access. This railcar may be configured as a bi-level or tri-level, and all decks are equipped with standard wheel chocks. Other quality features include a two-unit, articulated design for a smoother ride and a wider interior with door-edge protection.



### THE GREENBRIER COMPANIES

One Centerpointe Drive, Suite 200  
Lake Oswego, Oregon 97035

info@gbx.com

#### DIMENSIONS (APPROX.)


Length of two car unit, inside	141'-3 1/4"
Length of two car unit, over couplers	145'-4"
Truck centers	64'
Height, extreme	20'-2"
Width, inside	9'-3 1/2"
Width, extreme	10'-8"
Clearance	AAR Plate K
Door opening, width	8'-5"

#### WEIGHT/CAPACITY (EST.)

Light weight	150,000 lbs.
Gross rail load	260,000 lbs.
Capacity/Load limit	110,000 lbs.

#### CURVE NEGOTIABILITY RADIUS

Uncoupled horizontal	180'
Uncoupled vertical	1,250'
Coupled to like car	245'
Coupled to 40' base car	299'

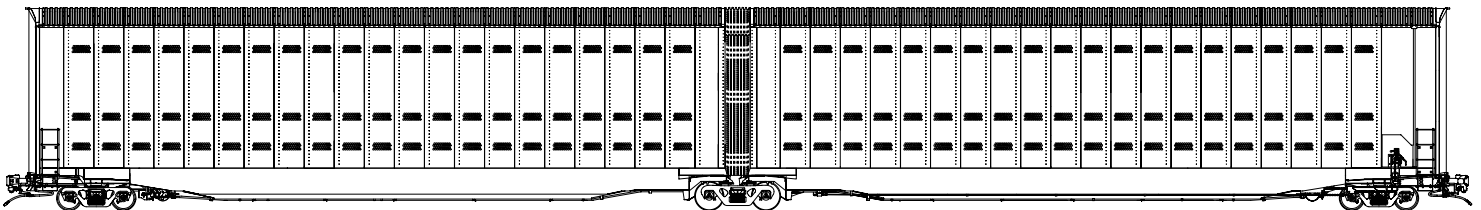

*These general dimensions are representative and subject to change without notice.*