

## 15,200 Gallon DOT 111 Tank Car

This 15,200 gallon tank car is non-insulated, non-coiled and built to operate at 286,000 lbs gross rail load for the transportation of sulfuric acid. This tank car meets DOT 111A100W2 specifications. Various options for loading/unloading valve configurations are available depending on the service requirements.



**THE GREENBRIER COMPANIES**  
One Centerpointe Drive, Suite 200  
Lake Oswego, Oregon 97035  
sales.info@gbrx.com

### DIMENSIONS (APPROX.)



Length over truck centers	32'-2 1/2"
Height, extreme	15' 7/8"
Width, extreme	10'-5"
Tank, outside diameter	8'-4 1/8"
Tank, outside length	39'-8 1/4"
Length over pulling faces	45'-9"
Clearance	AAR Plate B

### WEIGHT/CAPACITY (EST.)

Capacity	15,200 gal.
Light weight	60,000 lbs.
Load limit	226,000 lbs.
Gross rail load	286,000 lbs.

### CURVE NEGOTIABILITY RADIUS

Uncoupled	150'
Coupled to like car	159'
Coupled base car	158'

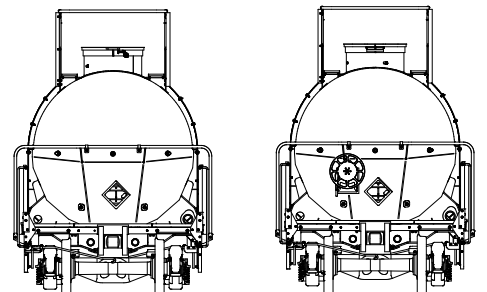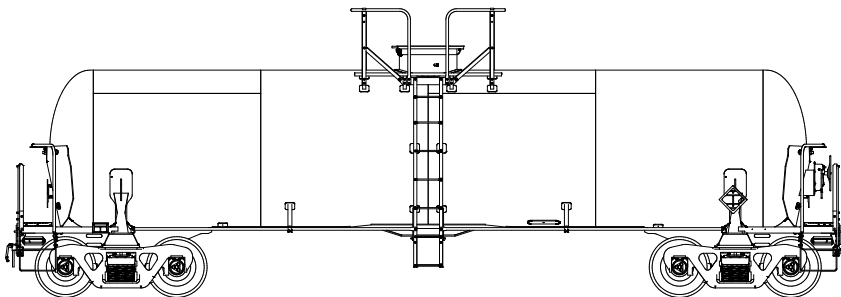

*These general dimensions are representative and subject to change without notice.*