

## 3250 Covered Hopper Railcar

This 3,250 cubic feet capacity covered hopper railcar has a curve sided design with two compartments and gravity outlet gates specifically designed for sand and cement. This railcar features the robust strength provided by a through center sill and can be furnished lined. This covered hopper comes equipped with three circular hatches and gravity outlet gates. Various roof hatch configurations and outlet gates are available.



### THE GREENBRIER COMPANIES

One Centerpointe Drive, Suite 200  
Lake Oswego, Oregon 97035

info@gbx.com

#### DIMENSIONS (APPROX.)




Length, inside	36'-8 1/8"
Length, over couplers	41'-11 1/2"
Height, inside	N/A
Height, extreme	15'-3"
Clearance	AAR Plate C
Width, inside	N/A
Width, extreme	10'-8"
Door opening, width	N/A
Height, top of rail to threshold	N/A

#### WEIGHT/CAPACITY (EST.)

Light weight	52,000 lbs.
Load limit	234,000 lbs.
Gross rail load	286,000 lbs.
Capacity	3,250 cu. ft.

#### CURVE NEGOTIABILITY RADIUS

Uncoupled	150'
Coupled to base car	185'
Coupled to like car	185'

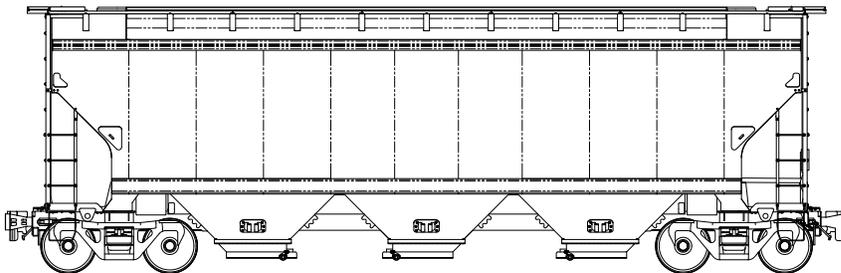

*These general dimensions are representative and subject to change without notice.*