

3258 Covered Hopper Railcar

This versatile small-cube two outlet covered hopper is available in stub-or through-sil. This 3,258 cubic foot covered hopper has three circular hatches. It is used for corrosive dry bulk service, including products such as rock salt and sodium chloride.



THE GREENBRIER COMPANIES

One Centerpoint Drive, Suite 200
Lake Oswego, Oregon 97035

info@gbx.com

DIMENSIONS (APPROX.)



| | |
|-----------------------|-----------------------------------|
| Length, inside | 37'-4 1/2" |
| Length, over couplers | 41'-11" |
| Height, inside | 14'-8 1/4" |
| Height, extreme | 15'-1" |
| Clearance | AAR Plate C |
| Outlets | (2) 13x42 stainless-steel gravity |
| Width, extreme | 10'-7 5/8" |
| Hoppers | 2 |
| Hatch Covers | (3) 30" dia. |

WEIGHT/CAPACITY (EST.)

| | |
|-----------------|---------------|
| Light weight | 53,500 lbs. |
| Load limit | 232,500 lbs. |
| Gross rail load | 286,000 lbs. |
| Capacity | 3,258 cu. ft. |

CURVE NEGOTIABILITY RADIUS

| | |
|---------------------|------|
| Uncoupled | 150' |
| Coupled to base car | 153' |
| Coupled to like car | 140' |

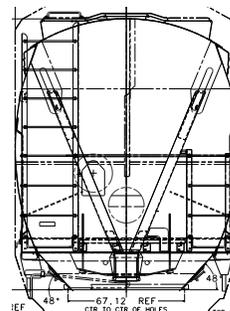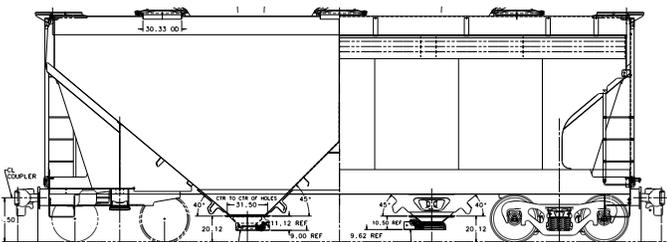

These general dimensions are representative and subject to change without notice.