

50' Boxcar

This 50'-6" boxcar is equipped with a single 12'-4" plug door. Options for other door type configurations are available. Floor anchors may be included for additional load securement needs, allowing this railcar to be used in a variety of services.

DIMENSIONS (APPROX.)

| | |
|----------------------------------|--------------------|
| Length, inside | 50'-6" |
| Length, over couplers | 58'-2" |
| Height, inside | 13'-1" |
| Height, extreme | 17' |
| Clearance | AAR Plate F |
| Width, inside | 9'-6" |
| Width, extreme | 10'-7 7/8" |
| Door opening, width | 12' |
| Height, top of rail to threshold | 3'-7 5/8" |

WEIGHT/CAPACITY (EST.)

| | |
|-----------------|----------------------|
| Light weight | 73,000 lbs. |
| Load limit | 213,000 lbs. |
| Gross rail load | 286,000 lbs. |
| Capacity | 6,276 cu. ft. |

CURVE NEGOTIABILITY RADIUS




| | |
|---------------------|-------------|
| Uncoupled | 150' |
| Coupled to base car | 211' |
| Coupled to like car | 207' |



THE GREENBRIER COMPANIES

One Centerpoint Drive, Suite 200
Lake Oswego, Oregon 97035

info@gbx.com

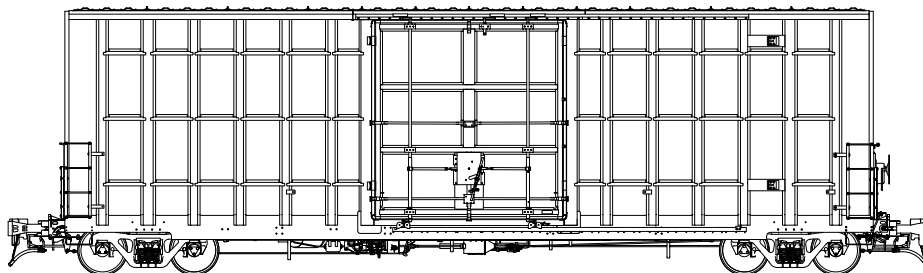

These general dimensions are representative and subject to change without notice.