

5800 Centerflow[®], 5800cf and 6260 Centerflow[®] Covered Hopper Railcars

Greenbrier offers three covered hoppers specifically designed for dry bulk products. All are ideally suited for plastic pellets and other free-flowing, light density products, these railcar provide both the shipper and receiver with the highest quality covered hopper railcar in the industry. From top hatches to bottom unloading gates, Greenbrier's covered hoppers are built to protect against even the smallest product contamination. Various roof hatch configurations and outlet gates are available.



THE GREENBRIER COMPANIES



One Centerpoint Drive, Suite 200
Lake Oswego, Oregon 97035

info@gbrx.com

DIMENSIONS (APPROX.)	5800 Centerflow [®]	5800cf	6260 Centerflow [®]
Length, inside	59'-10 3/16"	57'-4 5/8"	63'-6-1/8"
Length, over couplers	64'-7 1/2"	62'-5"	68'-3 1/2"
Height, inside	N/A	N/A	N/A
Height, extreme	15'-5 1/8"	15'-6"	15'-5 11/16"
Clearance	AAR Plate C	AAR Plate C	AAR Plate C
Width, inside	N/A	N/A	N/A
Width, extreme	10'-8"	10'-8"	10'-1 9/16"
Door opening, width	N/A	N/A	N/A
Height, top of rail to threshold	N/A	N/A	N/A

WEIGHT/CAPACITY (EST.)	5800 Centerflow [®]	5800cf	6260 Centerflow [®]
Light weight	66,000 lbs.	64,500 lbs.	65,700 lbs.
Load limit	220,000 lbs.	221,500 lbs.	220,300 lbs.
Gross rail load	286,000 lbs.	286,000 lbs.	286,000 lbs.
Capacity	5,800 cu. ft.	5,800 cu. ft.	6,260 cu. ft.

CURVE NEGOTIABILITY RADIUS	5800 Centerflow [®]	5800cf	6260 Centerflow [®]
Uncoupled	180'	180'	180'
Coupled to base car	234'	253'	252'
Coupled to like car	237'	256'	249'

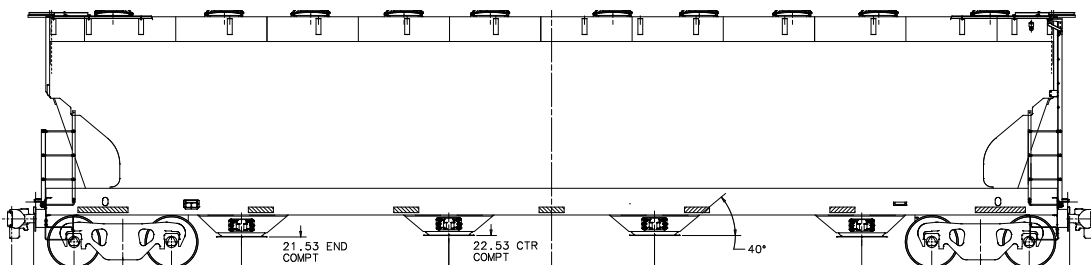

These general dimensions are representative and subject to change without notice.