

5660N Pressureaide® Covered Hopper Railcar

Pressureaide® covered hopper railcars are engineered to transport a wide variety of fluidizable dry bulk products. Our pressure differential railcars are designed and built to accept interior coatings compatible with the intended product service. Each railcar comes equipped with proprietary pressure differential pneumatic unloading system, which consists of all piping and fittings required to connect at the unloading facility, including air flow and product discharge valves, pressure gauges and pressure relief devices. The Pressureaide® railcar operates with internal air pressures up to 14.5 PSI allowing for safe, efficient product transfer.



THE GREENBRIER COMPANIES

One Centerpoint Drive, Suite 200
Lake Oswego, Oregon 97035

info@gbx.com

DIMENSIONS (APPROX.)


Length, inside	59'-6 1/8"
Length, over couplers	64'-3 1/2"
Height, inside	15'-1"
Height, extreme	15'-5 13/16"
Clearance	AAR Plate C
Outlets	Manifold
Width, extreme	10'-4"
Hoppers	5
Hatch Covers	(7) 20" dia.

WEIGHT/CAPACITY (EST.)

Light weight	65,900 lbs.
Load limit	219,100 lbs.
Gross rail load	286,000 lbs.
Capacity	5,660 cu. ft.

CURVE NEGOTIABILITY RADIUS

Uncoupled	180'
Coupled to base car	234'
Coupled to like car	235'

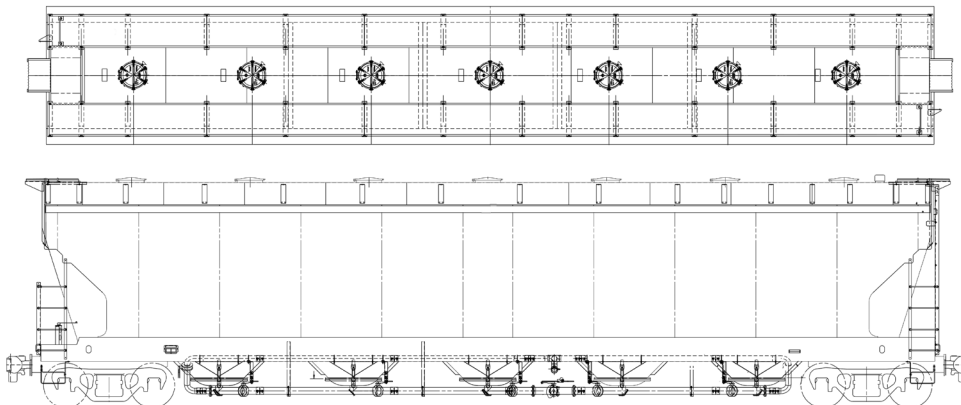

These general dimensions are representative and subject to change without notice.