

## 4650 Potash Covered Hopper Railcar

This 4,650 cubic feet capacity covered hopper railcar has a curve sided design with three compartments and gravity outlet gates specifically designed for corn service. This Centerflow® railcar features the higher load limit provided by a stub sill design. This covered hopper comes equipped with six hatches and gravity outlet gates. Various interior linings, roof hatch configurations and outlet gates are available.



### THE GREENBRIER COMPANIES

One Centerpointe Drive, Suite 200  
Lake Oswego, Oregon 97035

info@gbx.com

#### DIMENSIONS (APPROX.)



Length, inside	<b>49'-6.5"</b>
Length, over couplers	<b>54'-6.5"</b>
Width, extreme	<b>10'-7.625'</b>
Height, extreme	<b>15'-5.125"</b>
Clearance	<b>AAR Plate C</b>

#### WEIGHT/CAPACITY (EST.)

Light weight	<b>62,400 lbs.</b>
Load limit	<b>223,600 lbs.</b>
Gross rail load	<b>286,000 lbs.</b>
Capacity	<b>4,690 cu. ft.</b>

#### CURVE NEGOTIABILITY RADIUS

Uncoupled	<b>150'</b>
Coupled to base car	<b>192'</b>
Coupled to like car	<b>194'</b>

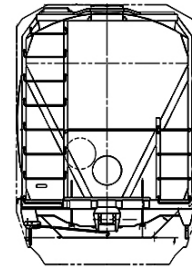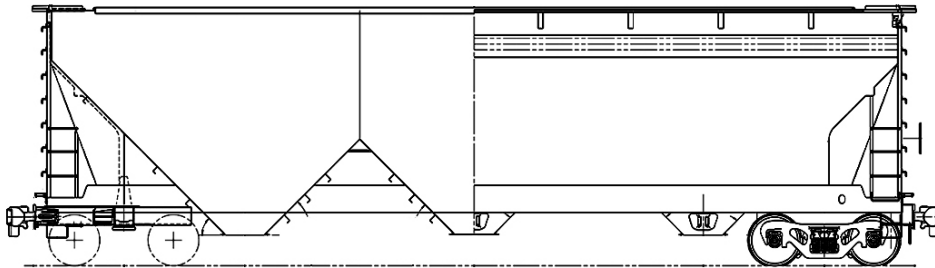

*These general dimensions are representative and subject to change without notice.*