

## Ultra-High-Strength Steel Gondola

These gondolas use an innovative formula for ultra-high-strength, lighter-weight steel, reducing each gondola's unloaded weight by up to 15,000 pounds. This gondola features a unique "tub design" that eases product hangup during loading/unloading.

This railcar was designed as part of the joint initiative with Norfolk Southern.



DIMENSIONS (APPROX.)	
Length, over couplers	57'-11 1/2"
Width, inside	9'-6"
Width, extreme	10'-6 3/4"
	5'-6"
Height, extreme	9'-2 5/16"




WEIGHT/CAPACITY (EST.)	
Light weight	54,000 lbs.
Load limit	232,000 lbs.
Gross rail load	286,000 lbs.
Capacity	2,796 cu. ft.

CURVE NEGOTIABILITY RADIUS	
Uncoupled	150'
Coupled to base car	216'
Coupled to like car	218'

**THE GREENBRIER COMPANIES**

One Centerpointe Drive, Suite 200  
Lake Oswego, Oregon 97035

info@gbrx.com

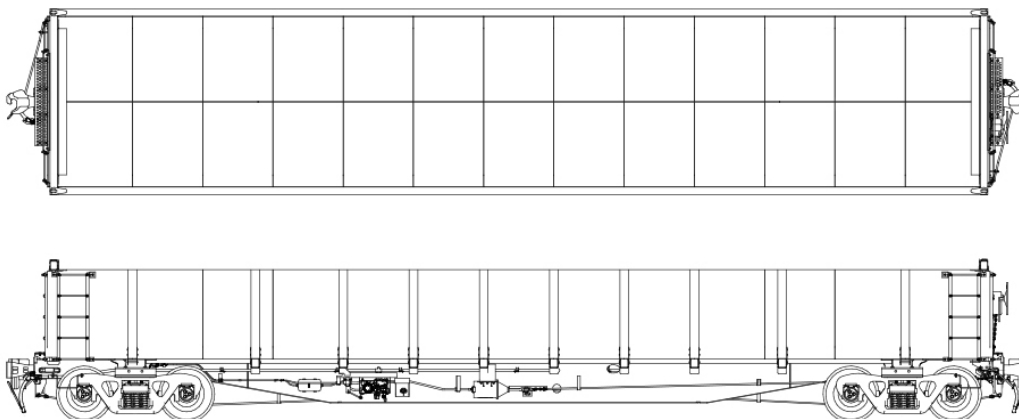

*These general dimensions are representative and subject to change without notice.*